Pro Easy Mug Press Machine

PD150

EN Start Here

⚠ Please read the warnings carefully to avoid potential injuries.

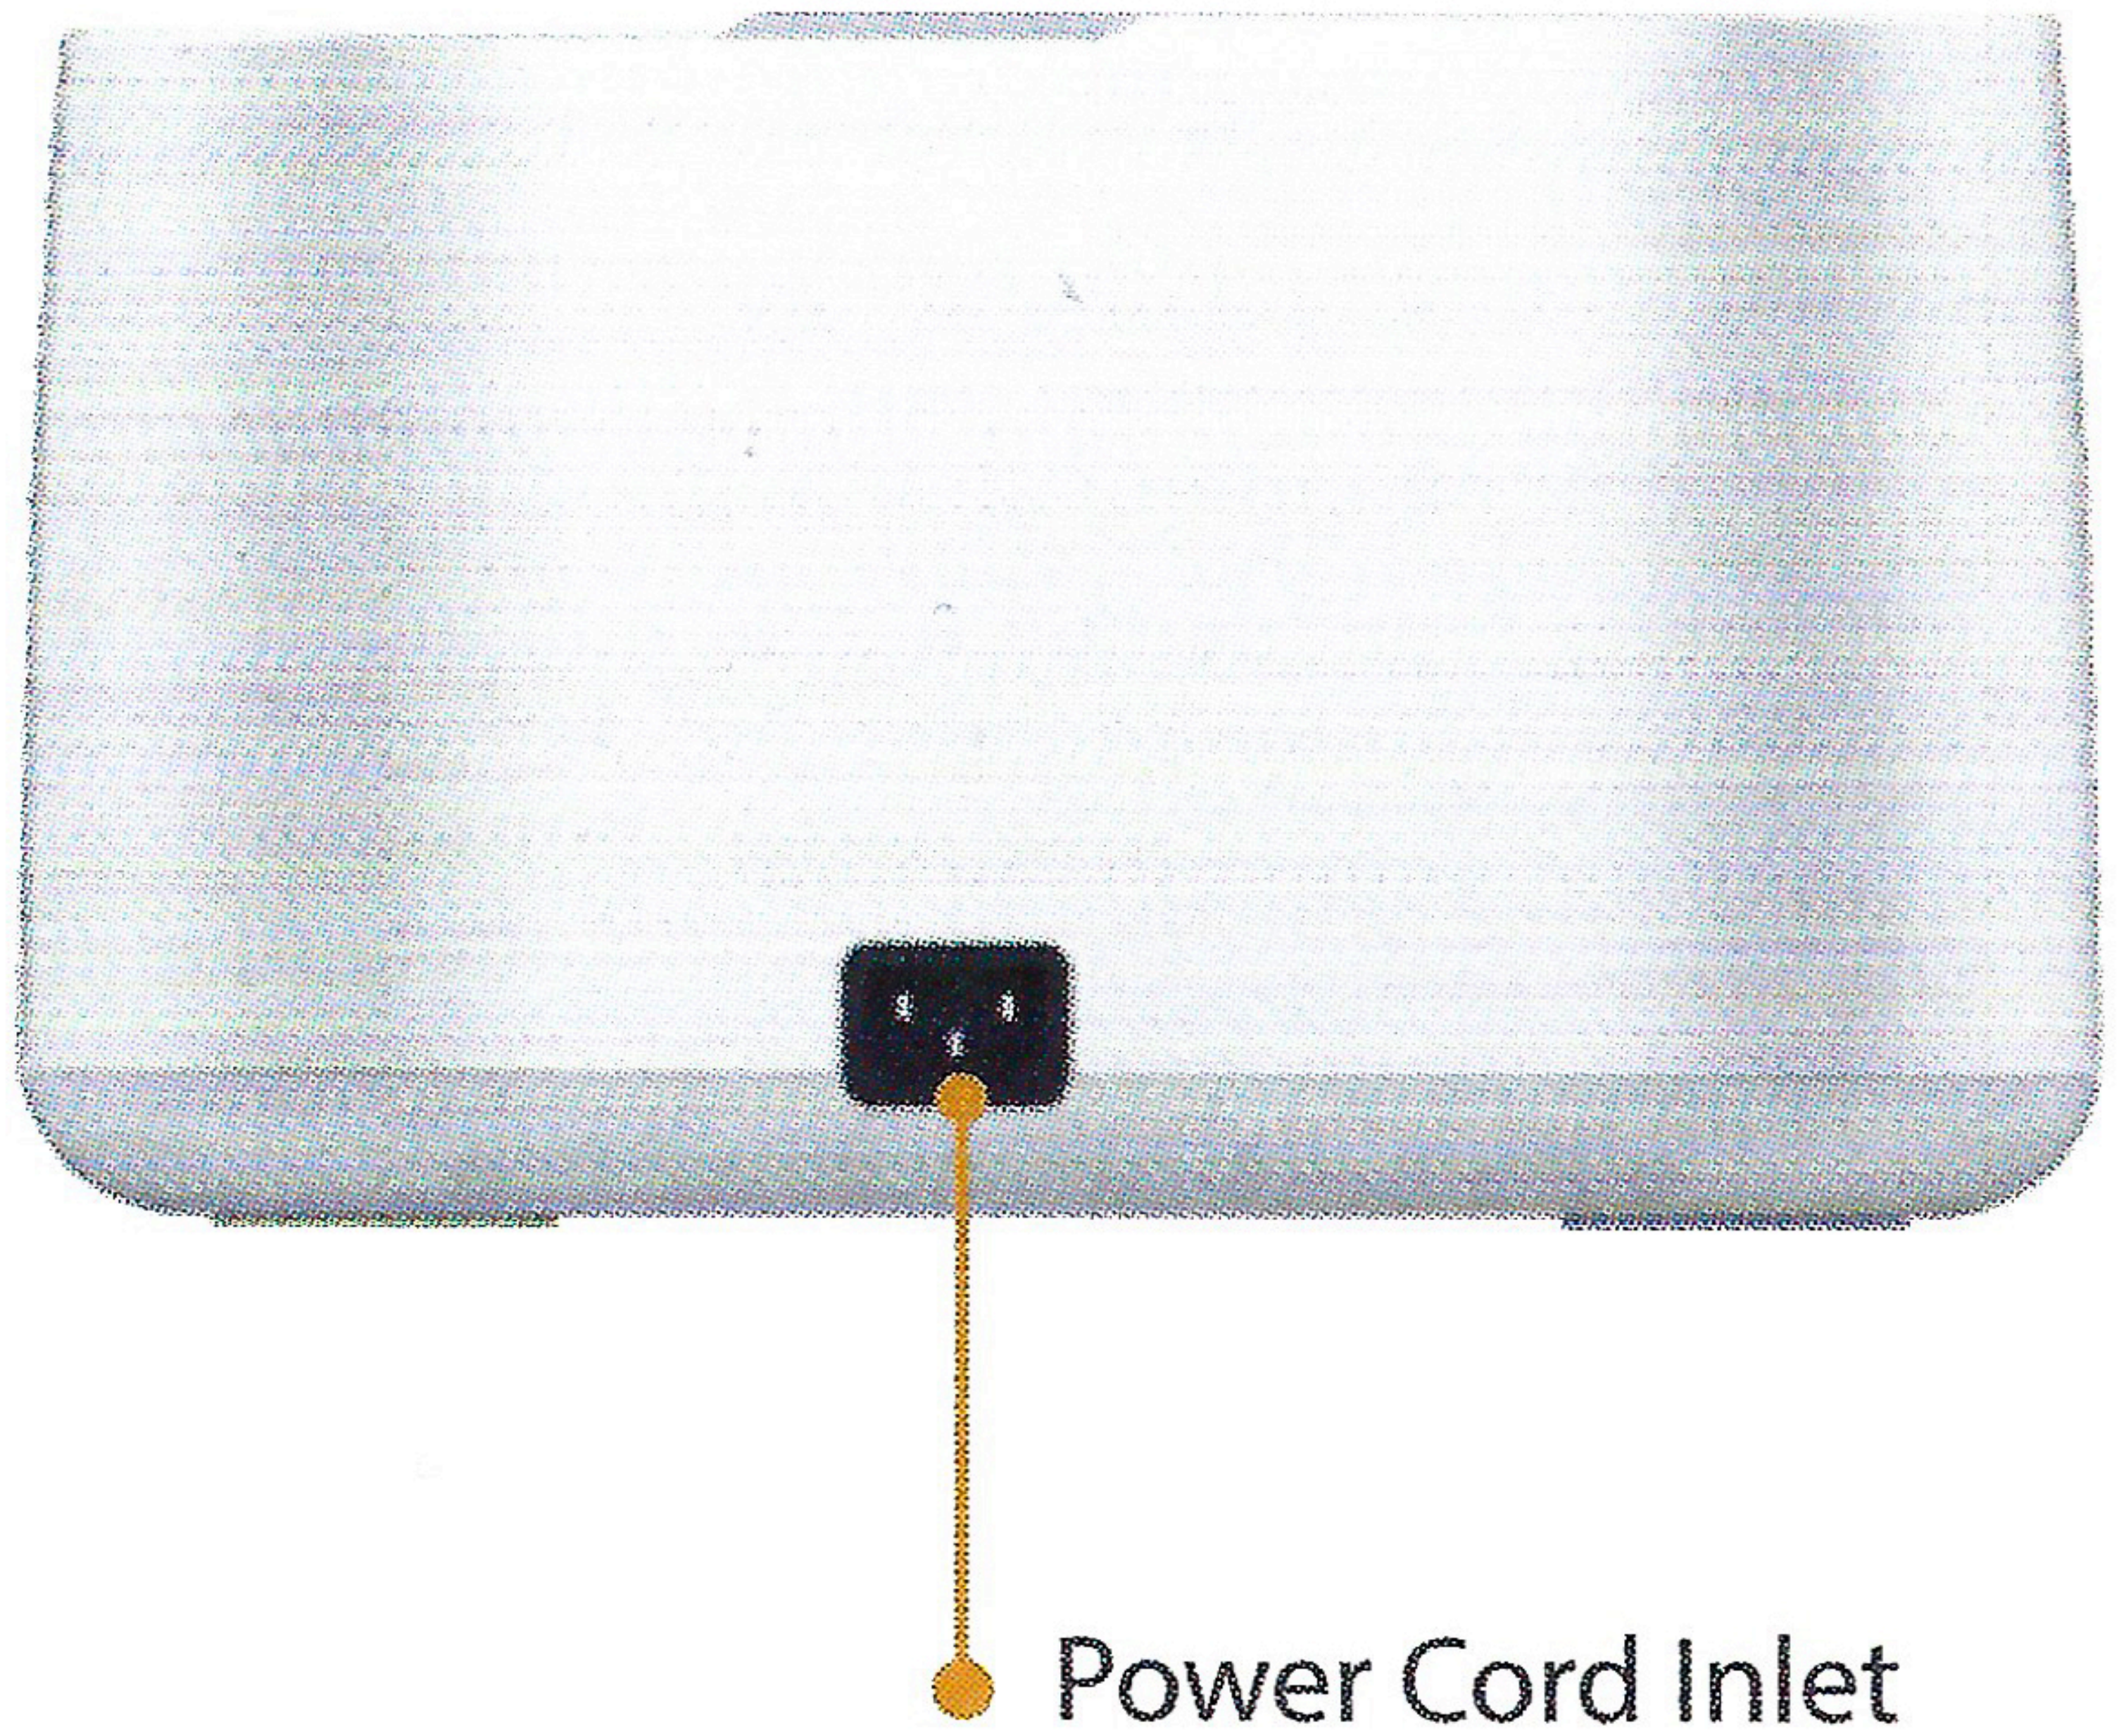

Note: Please make sure the voltage is compatible.

Connect the power cord to the inlet and plug the prong into the AC socket.

Main parameters

Product Name	Pro Easy Mug Press Machine
Item Number	PD150
Max. Temperature	200°C/392°F
Compatible Mug Size	11 oz. - 15 oz.
Rated Voltage/Frequency	220V/60Hz 110V/50Hz
Rated Power	280W

POWER ON/OFF

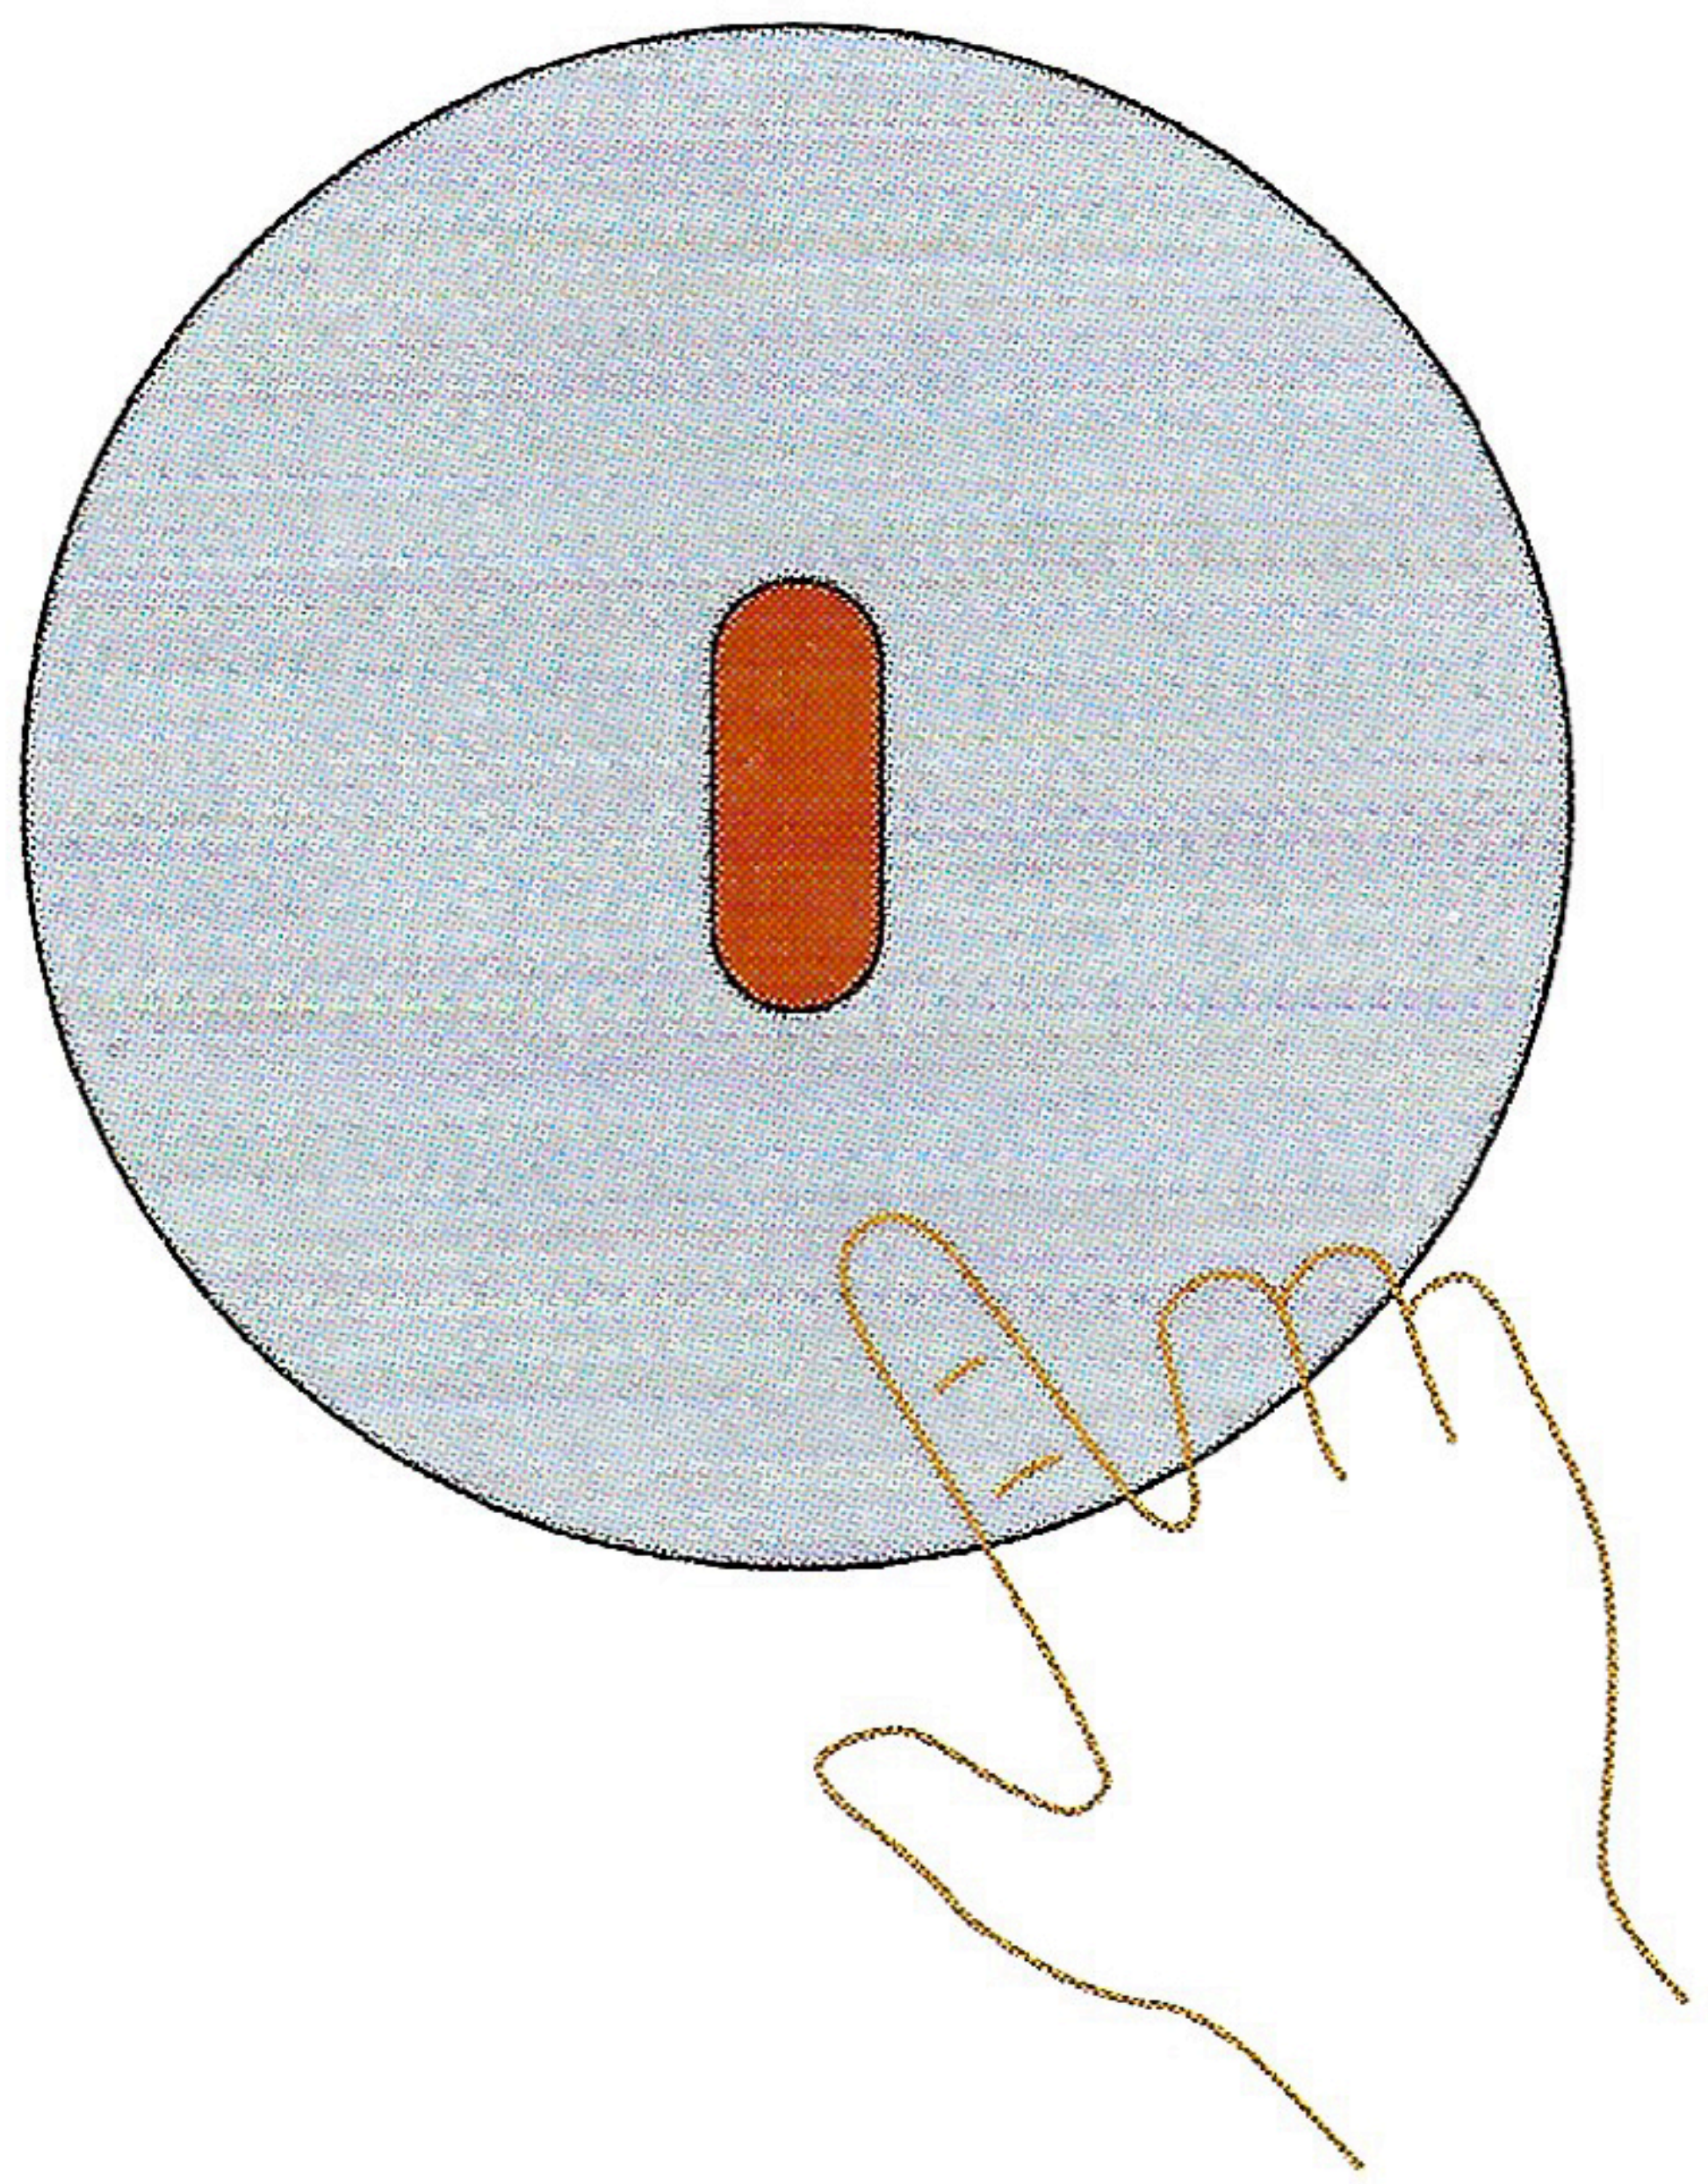

1. Press the power button once to turn on the mug press.
2. Long press the power button for 3 seconds to turn it off.
3. The machine will shut down automatically after 30 minutes of not being in use.

SAFETY INSTRUCTIONS

To avoid injuries or death caused by electric shock, please read all the instructions before using the machine.

1. Keep the machine unplugged when moving it.
2. Use the machine on a flat and stable surface in a ventilated room.
3. Wear heat-resistant gloves when using the machine.
4. Do not use the machine in a hazardous location.
5. Do not use the machine when it cannot function properly.
6. Do not disassemble and reassemble the machine without proper guidance.
7. Do not plug the machine in an incompatible AC outlet.
8. Do not touch the mug heater while the machine is heating up.
9. This machine is not intended to be used by people who have physical or sensory impairments or lack appropriate experience and knowledge unless under the supervision and guidance of a person responsible for their safety.
10. Children may only use the machine under the supervision of an adult responsible for their safety.

PRODUCT INTRODUCTION

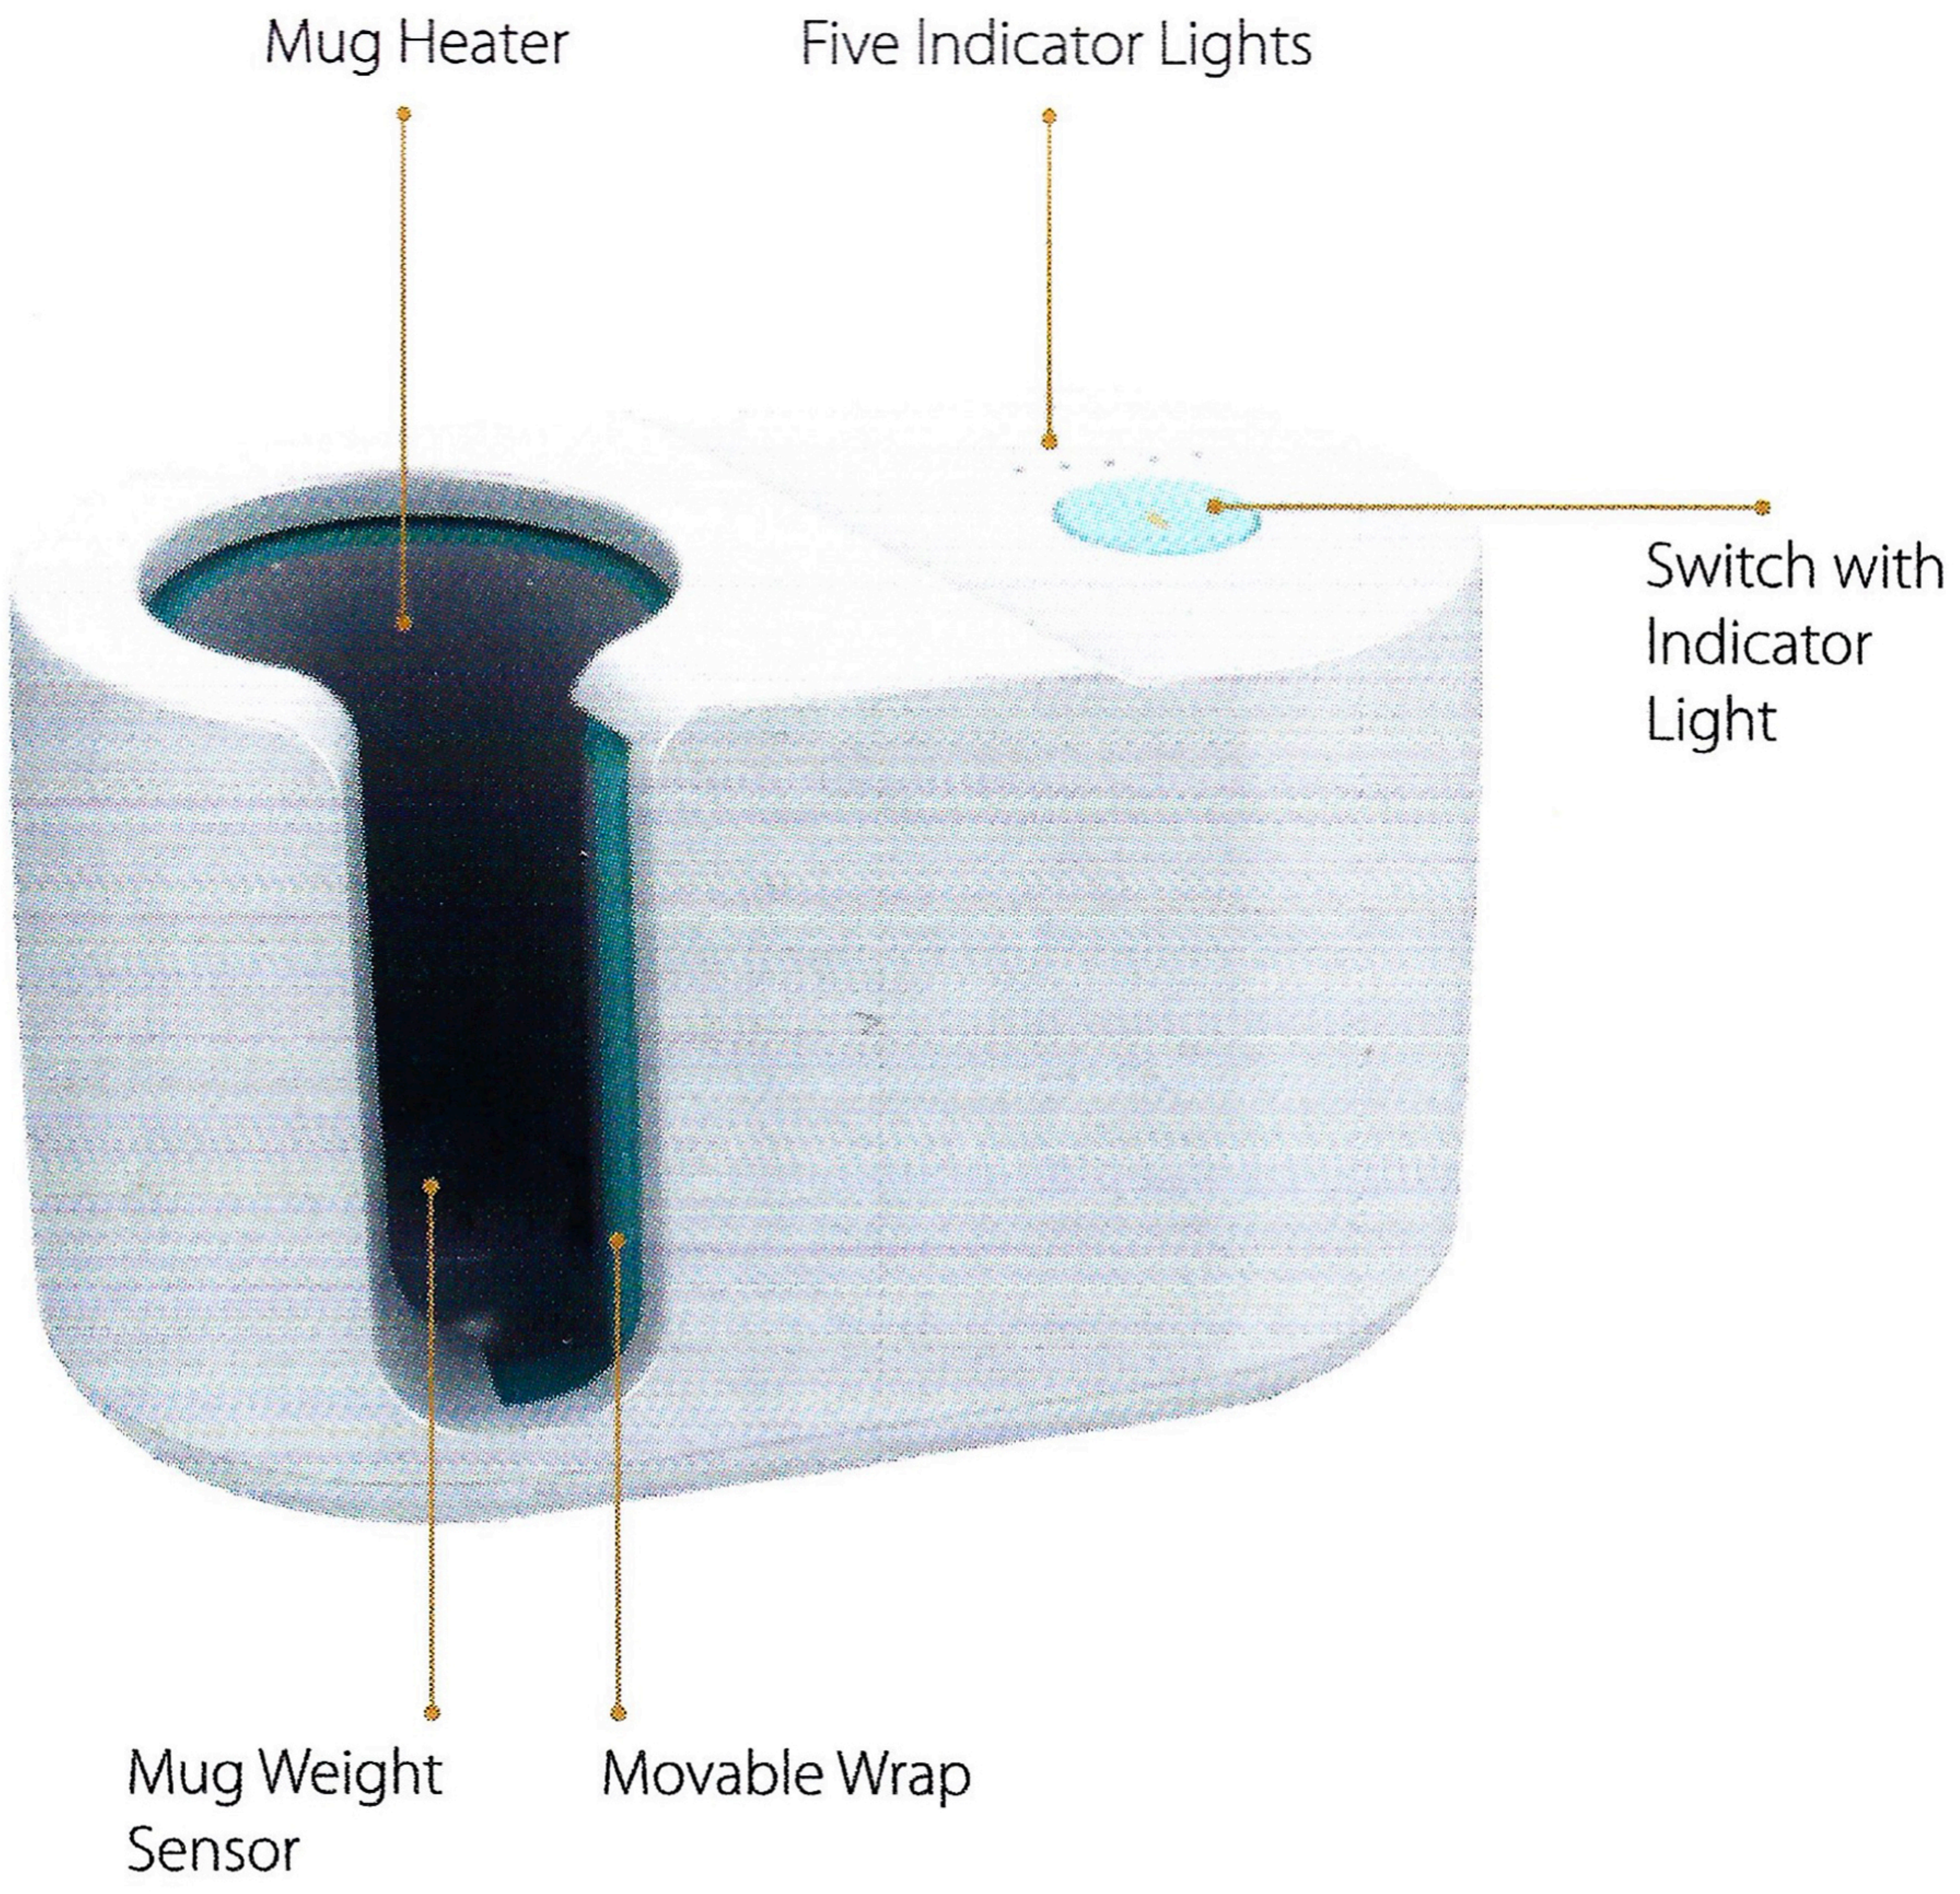

NOTE: The mug heater is vulnerable; it is not covered under the warranty.

HOW TO PRINT?

Caution! Avoid directly touching the heat plate.

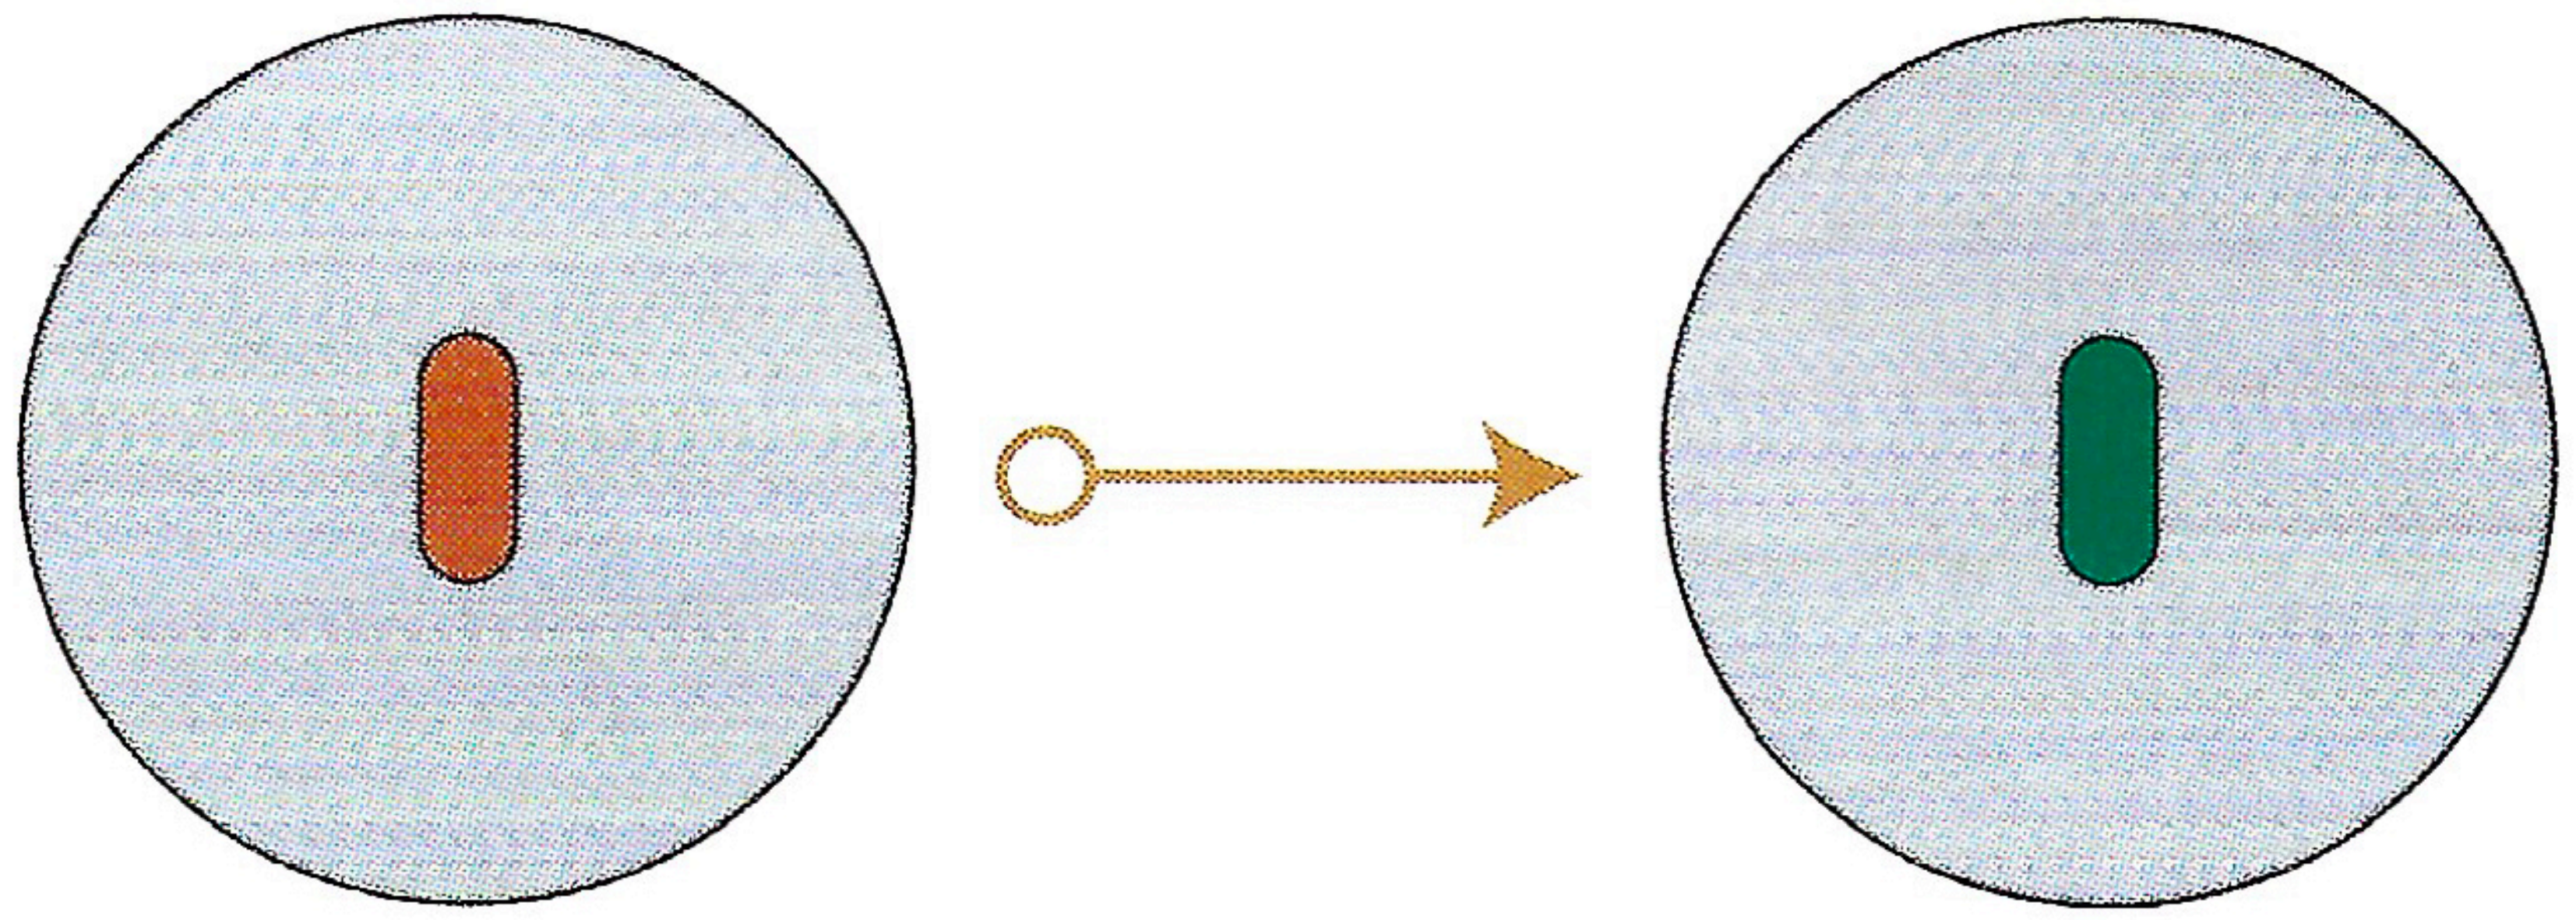

🟧 Orange: Heating in process

🟩 Green:Set temperature reached

1

1. When the indicator light turns green, you can start printing on your mug.

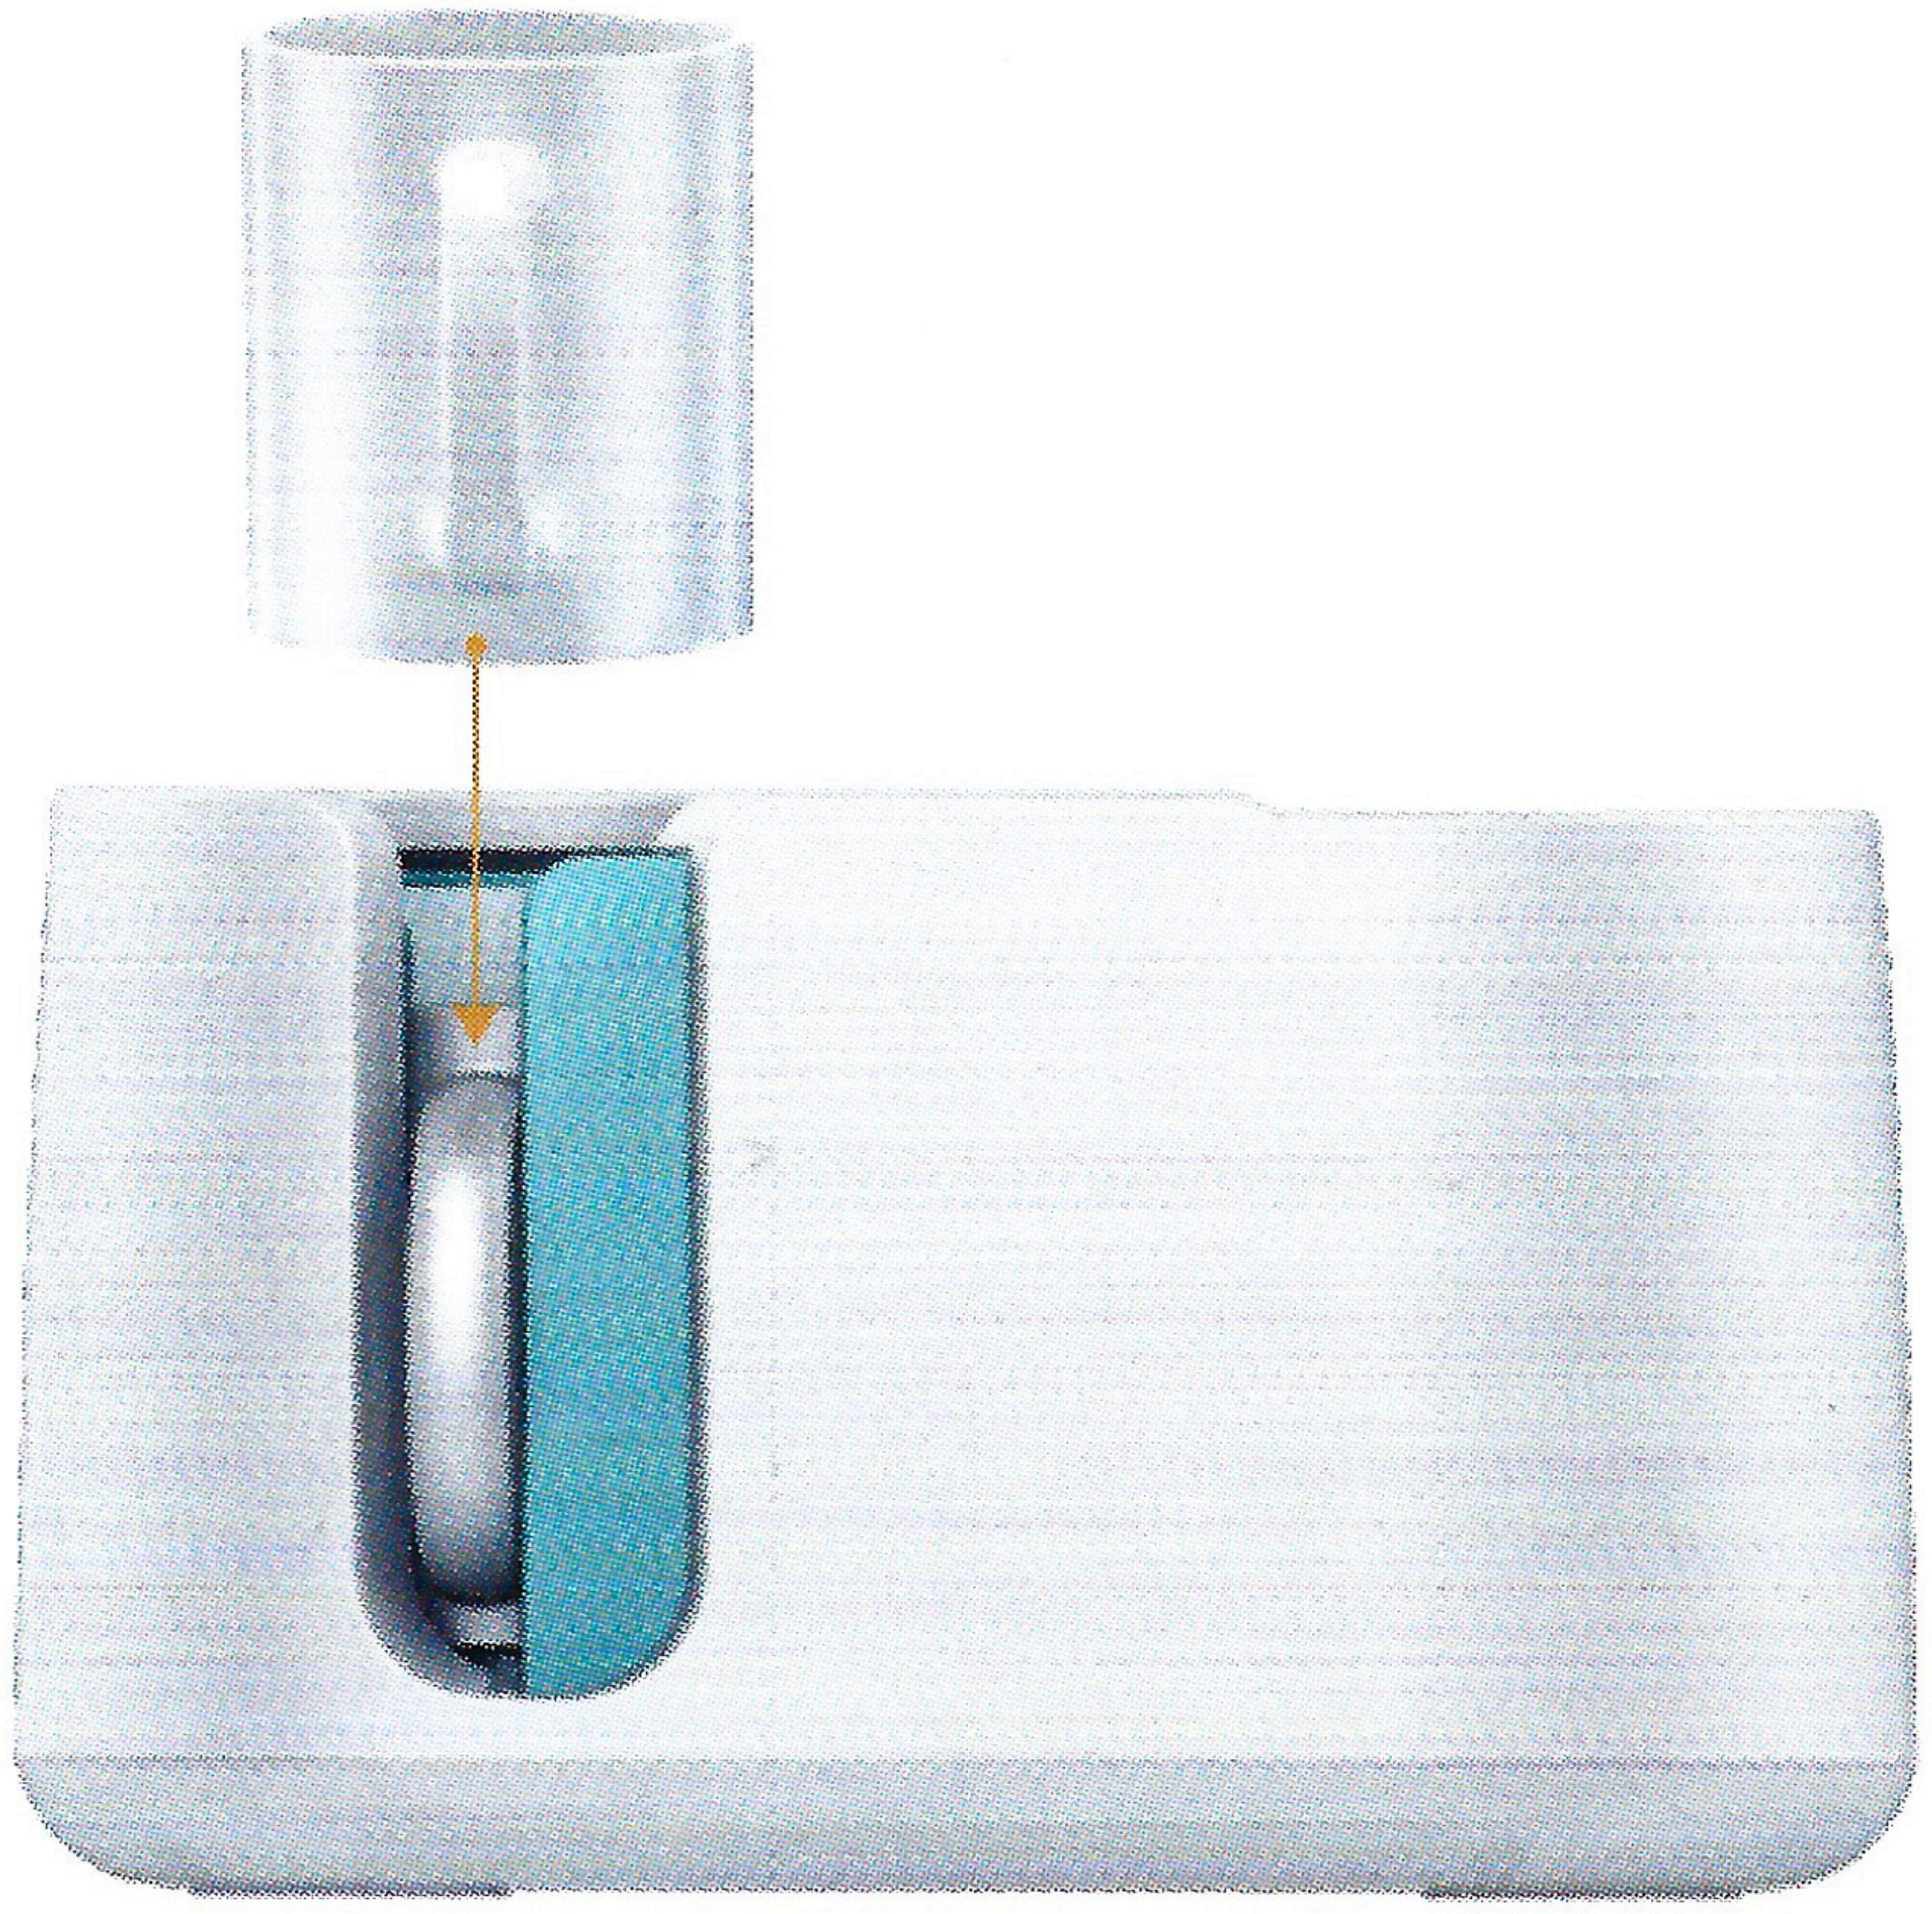

2

2. Put the mug into the mug heater. Once the sensor senses the mug, the mug heater will automatically enclose the mug.

INDICATOR LICHT STATE

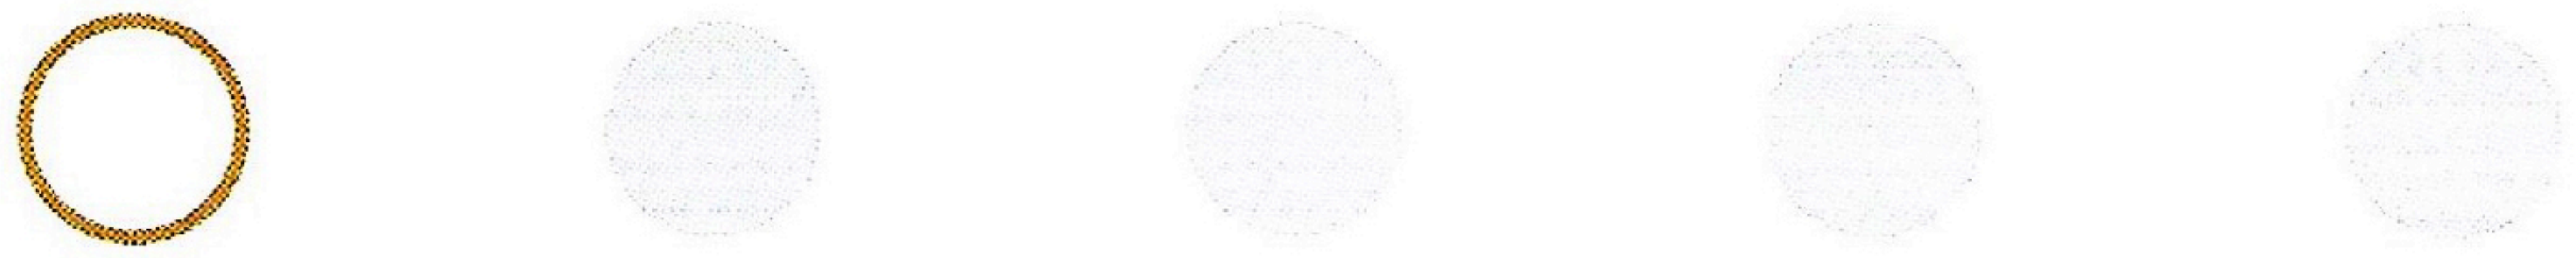

If the first light is blinking, the machine is still heating up.The entire heating process take sapproximately 180 seconds.

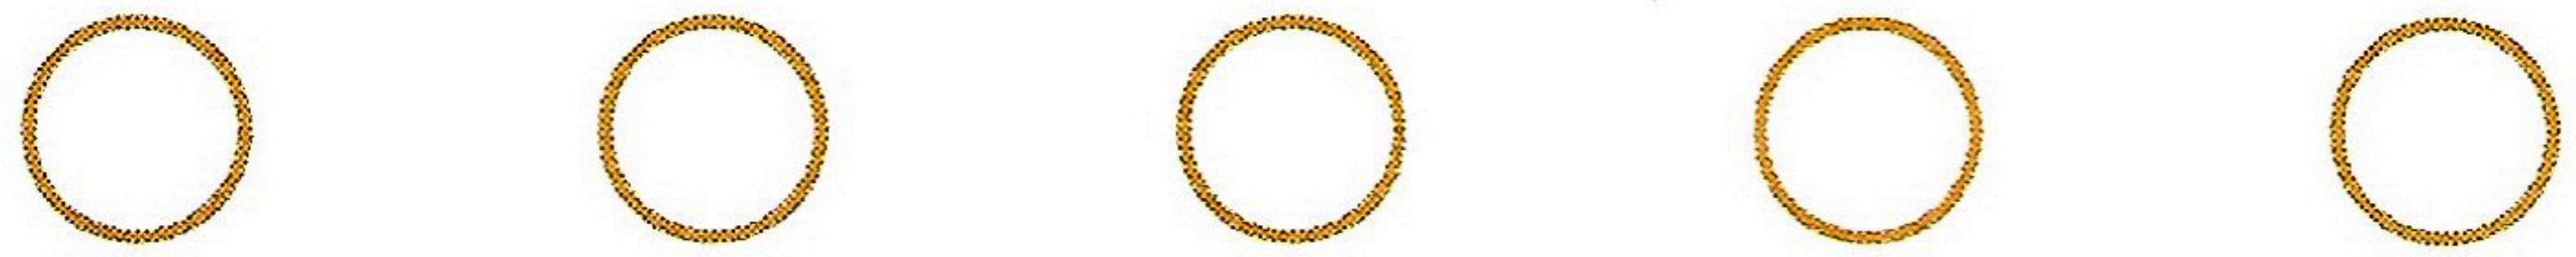

If all lights are on, the printing process is complete. The mug heater will open automatically, and you can take out the mug.

EMERGENCY STOP

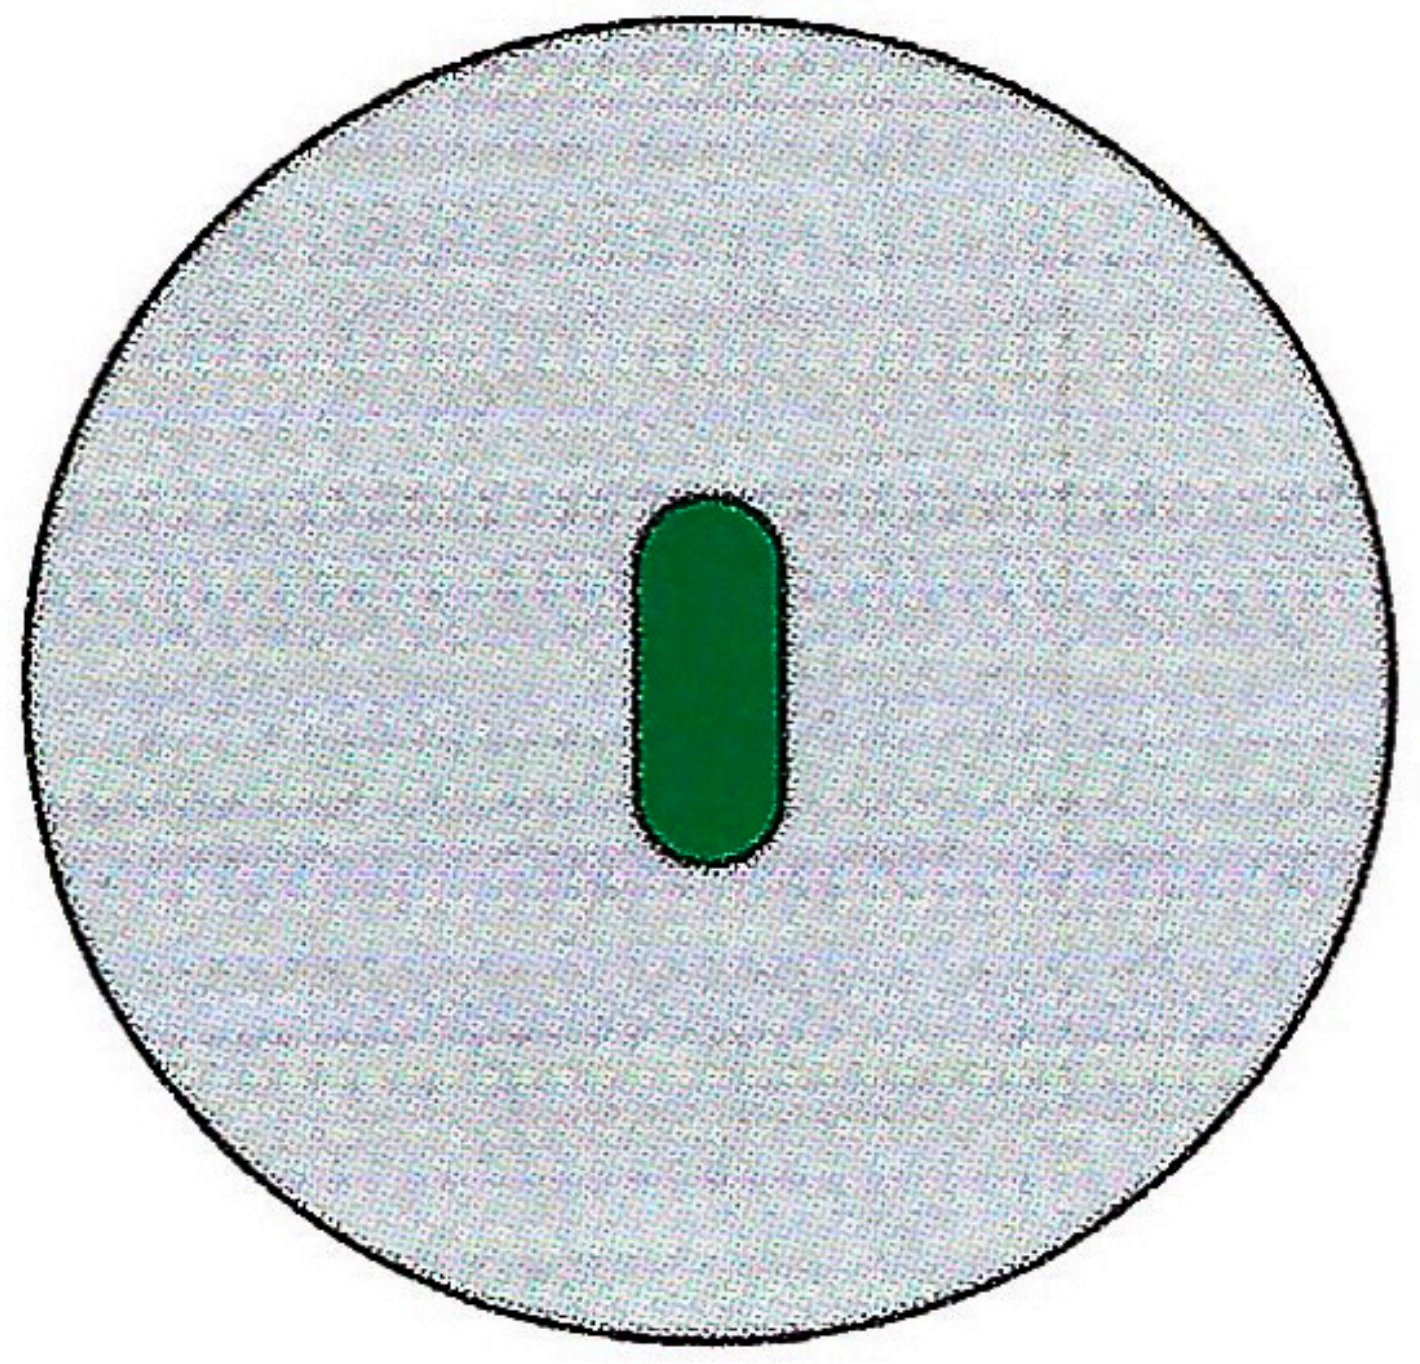

In case of emergency, you can press the power button anytime to open the mug heater.

RESET IRREGULAR LIGHT

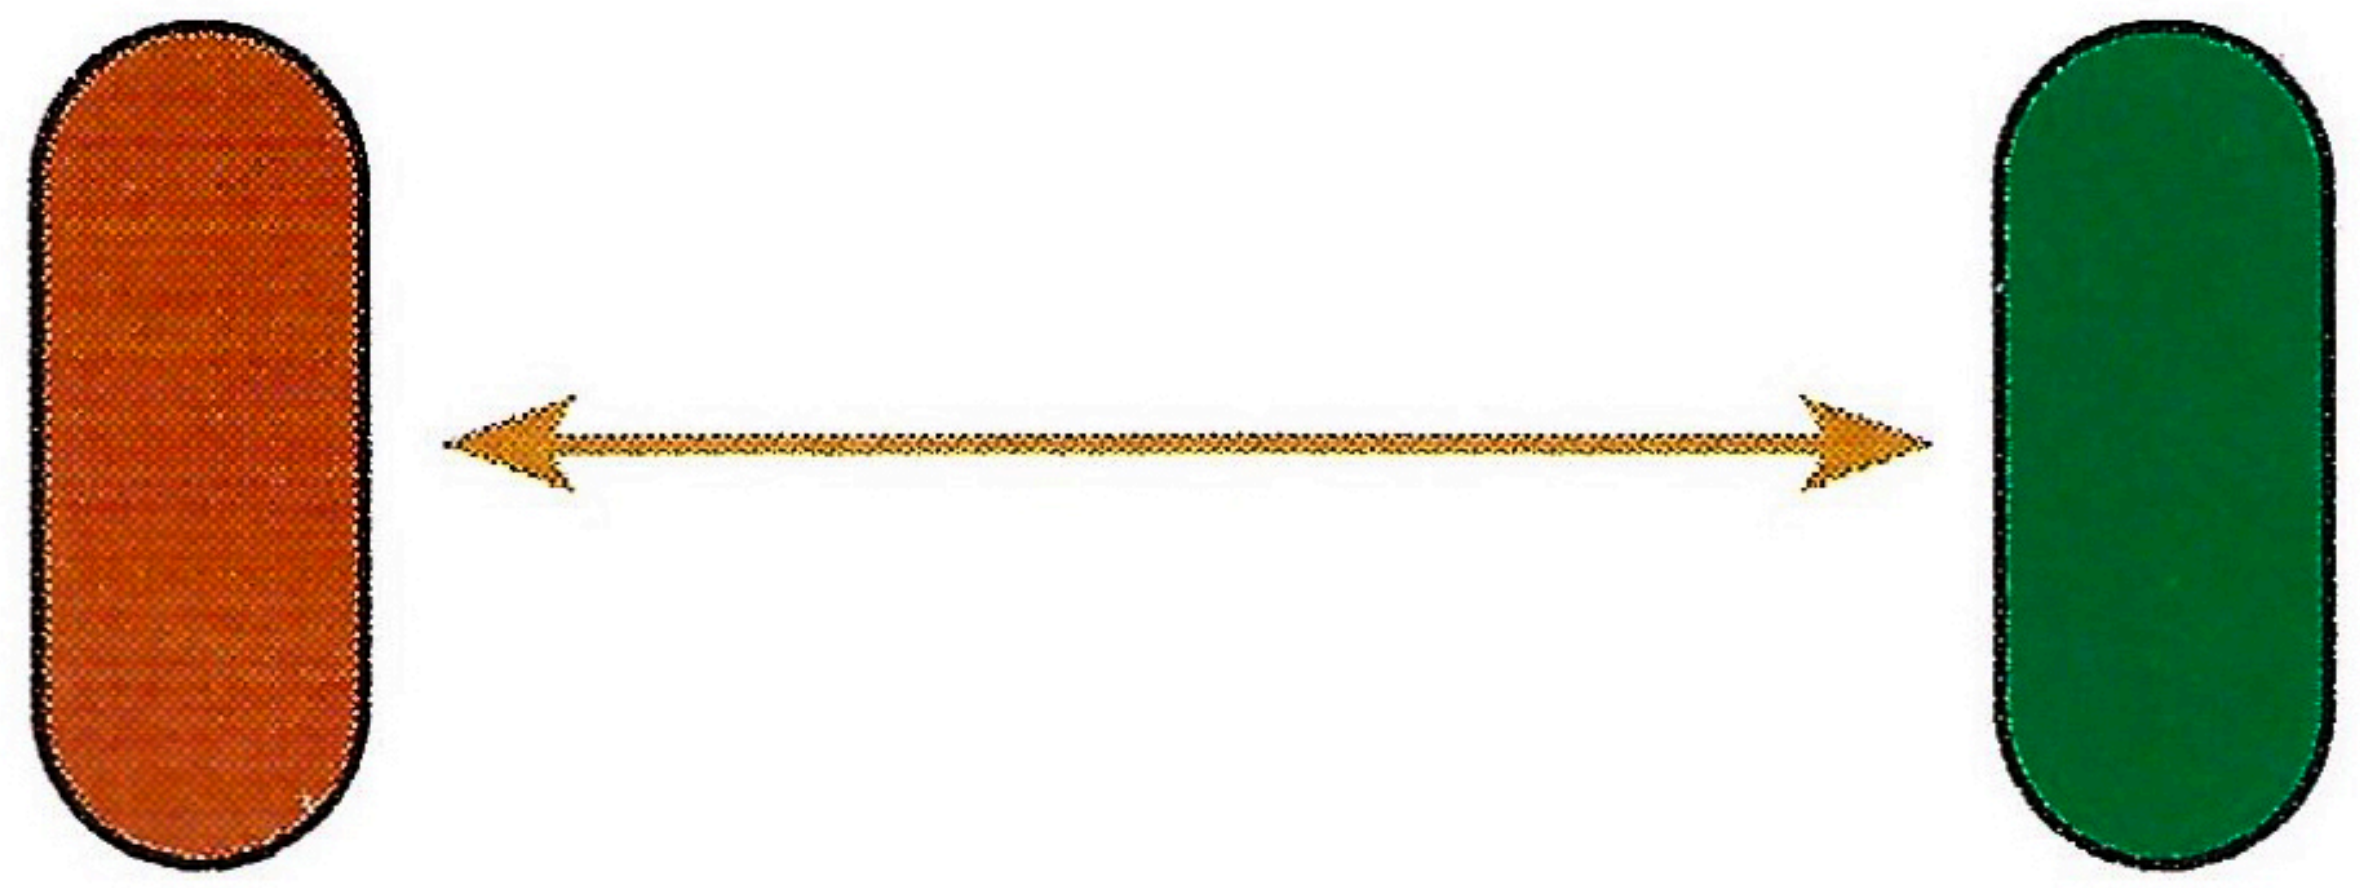

If the indicator light blinks irregularly, press the power button 5 continuous times to stop the machine. After 15 seconds, it will restart automatically.

SETTING THE TEMP

1. Turn off the machine or let it remain inactive.
2. Long press the power button for 6 seconds.
3. Release the button when the indicator light blinks in orange.
4. The five lights above indicate different temperature levels. Press the power button to choose the preferred temperature level.
5. Wait 5 seconds for the machine to automatically save the setting. The machine will then exit the setting mode.
6. The automatic temperature setting is Level 3.

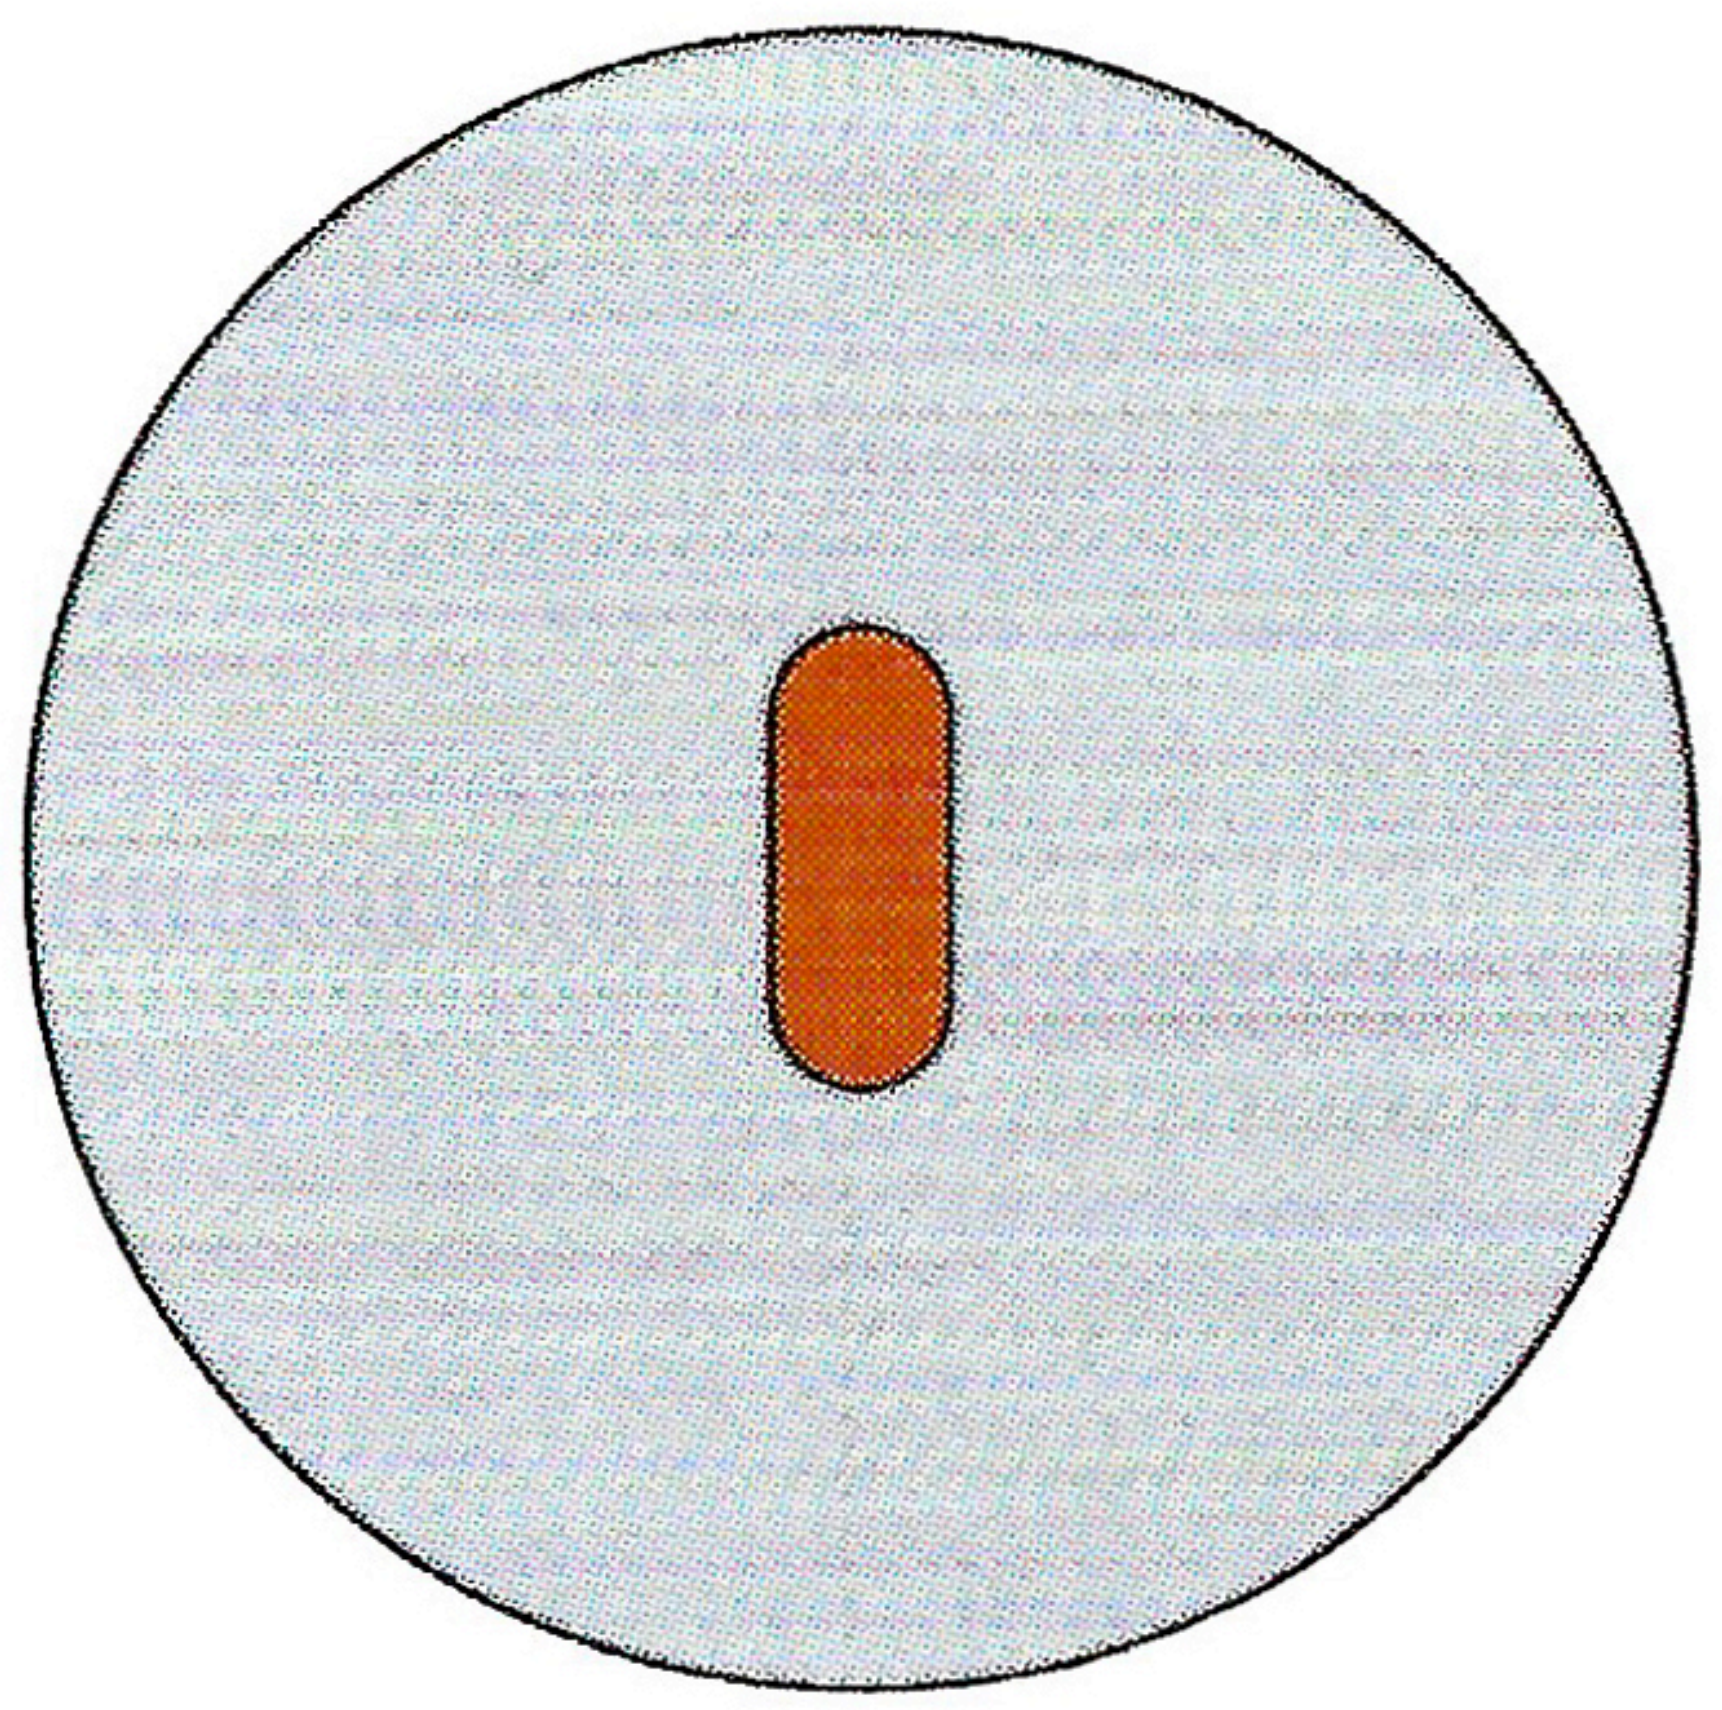

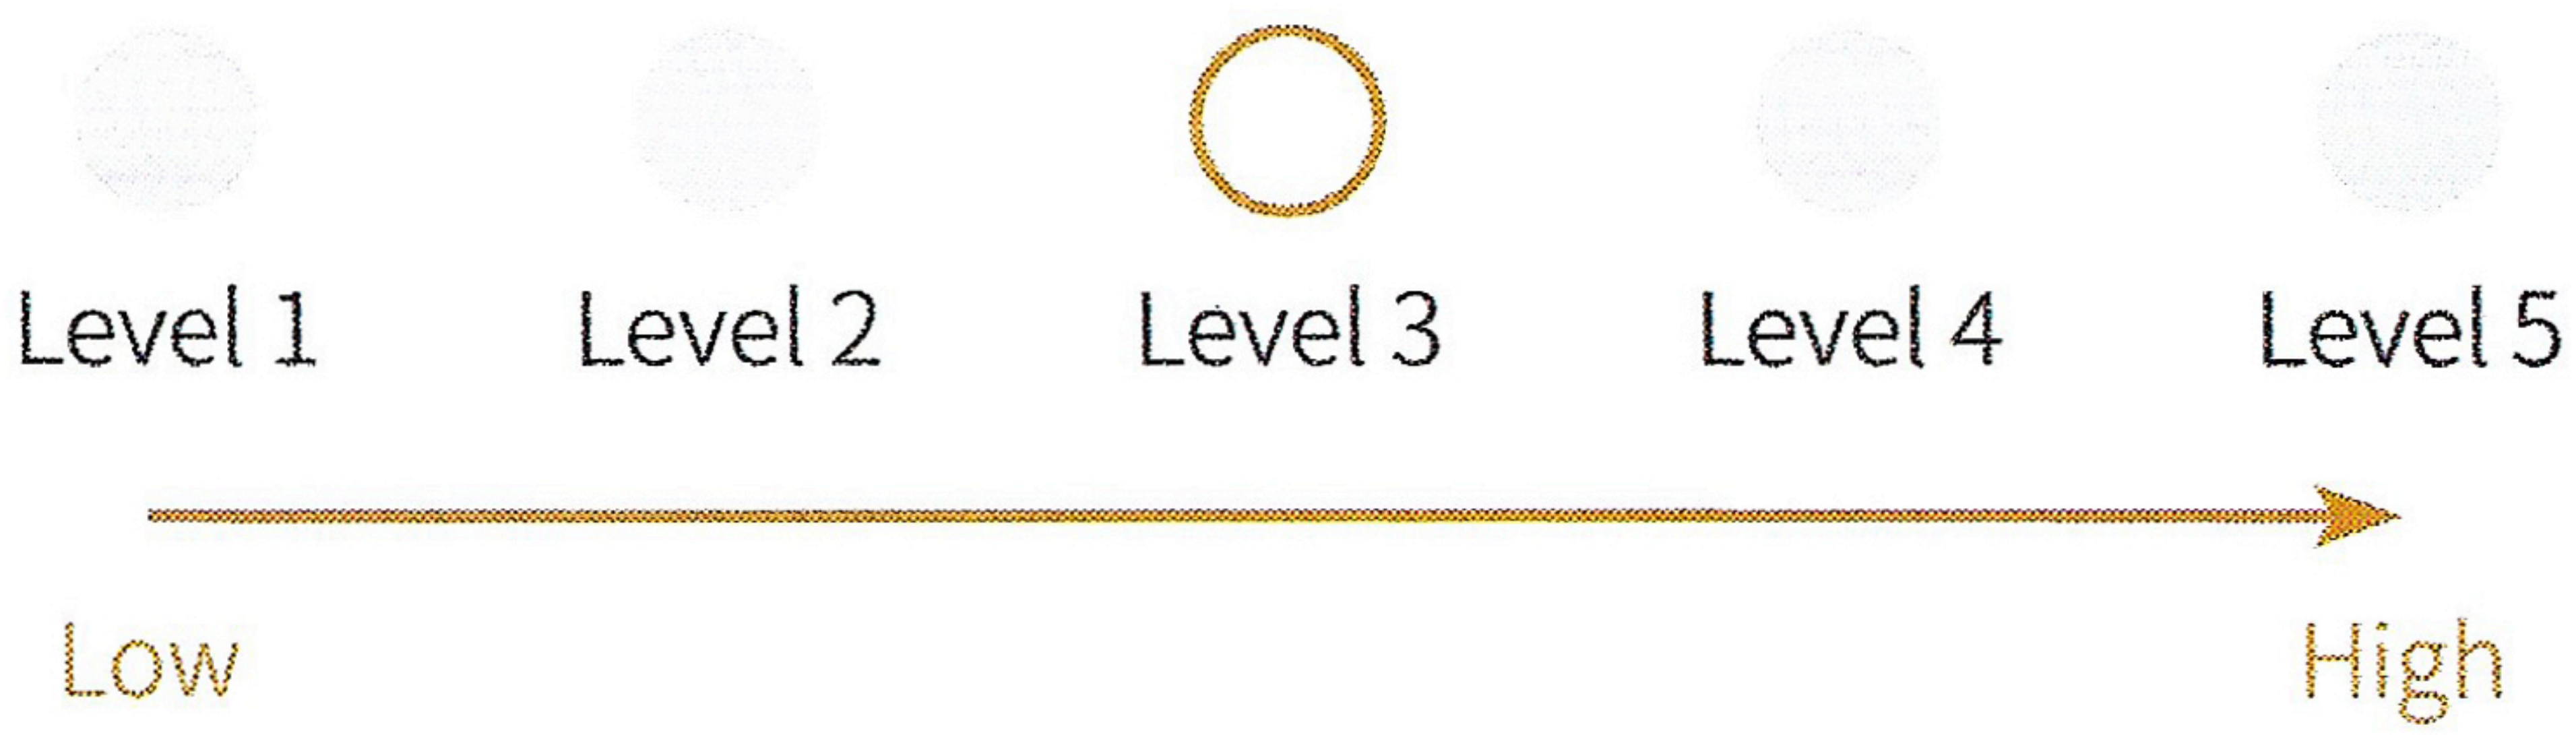

SETTING THE COUNTDOWN

1. Turn off the machine or let it remain inactive.
2. Long press the power button for 10 seconds.
3. Release the power button when the indicator light blinks in green .
4. The five lights above indicate different time lengths. Press the power button to choose the preferred countdown length.
5. Wait 5 seconds for the machine to automatically save the setting. The machine will then exit the setting mode.
6. The automatic countdown setting is 60 seconds.

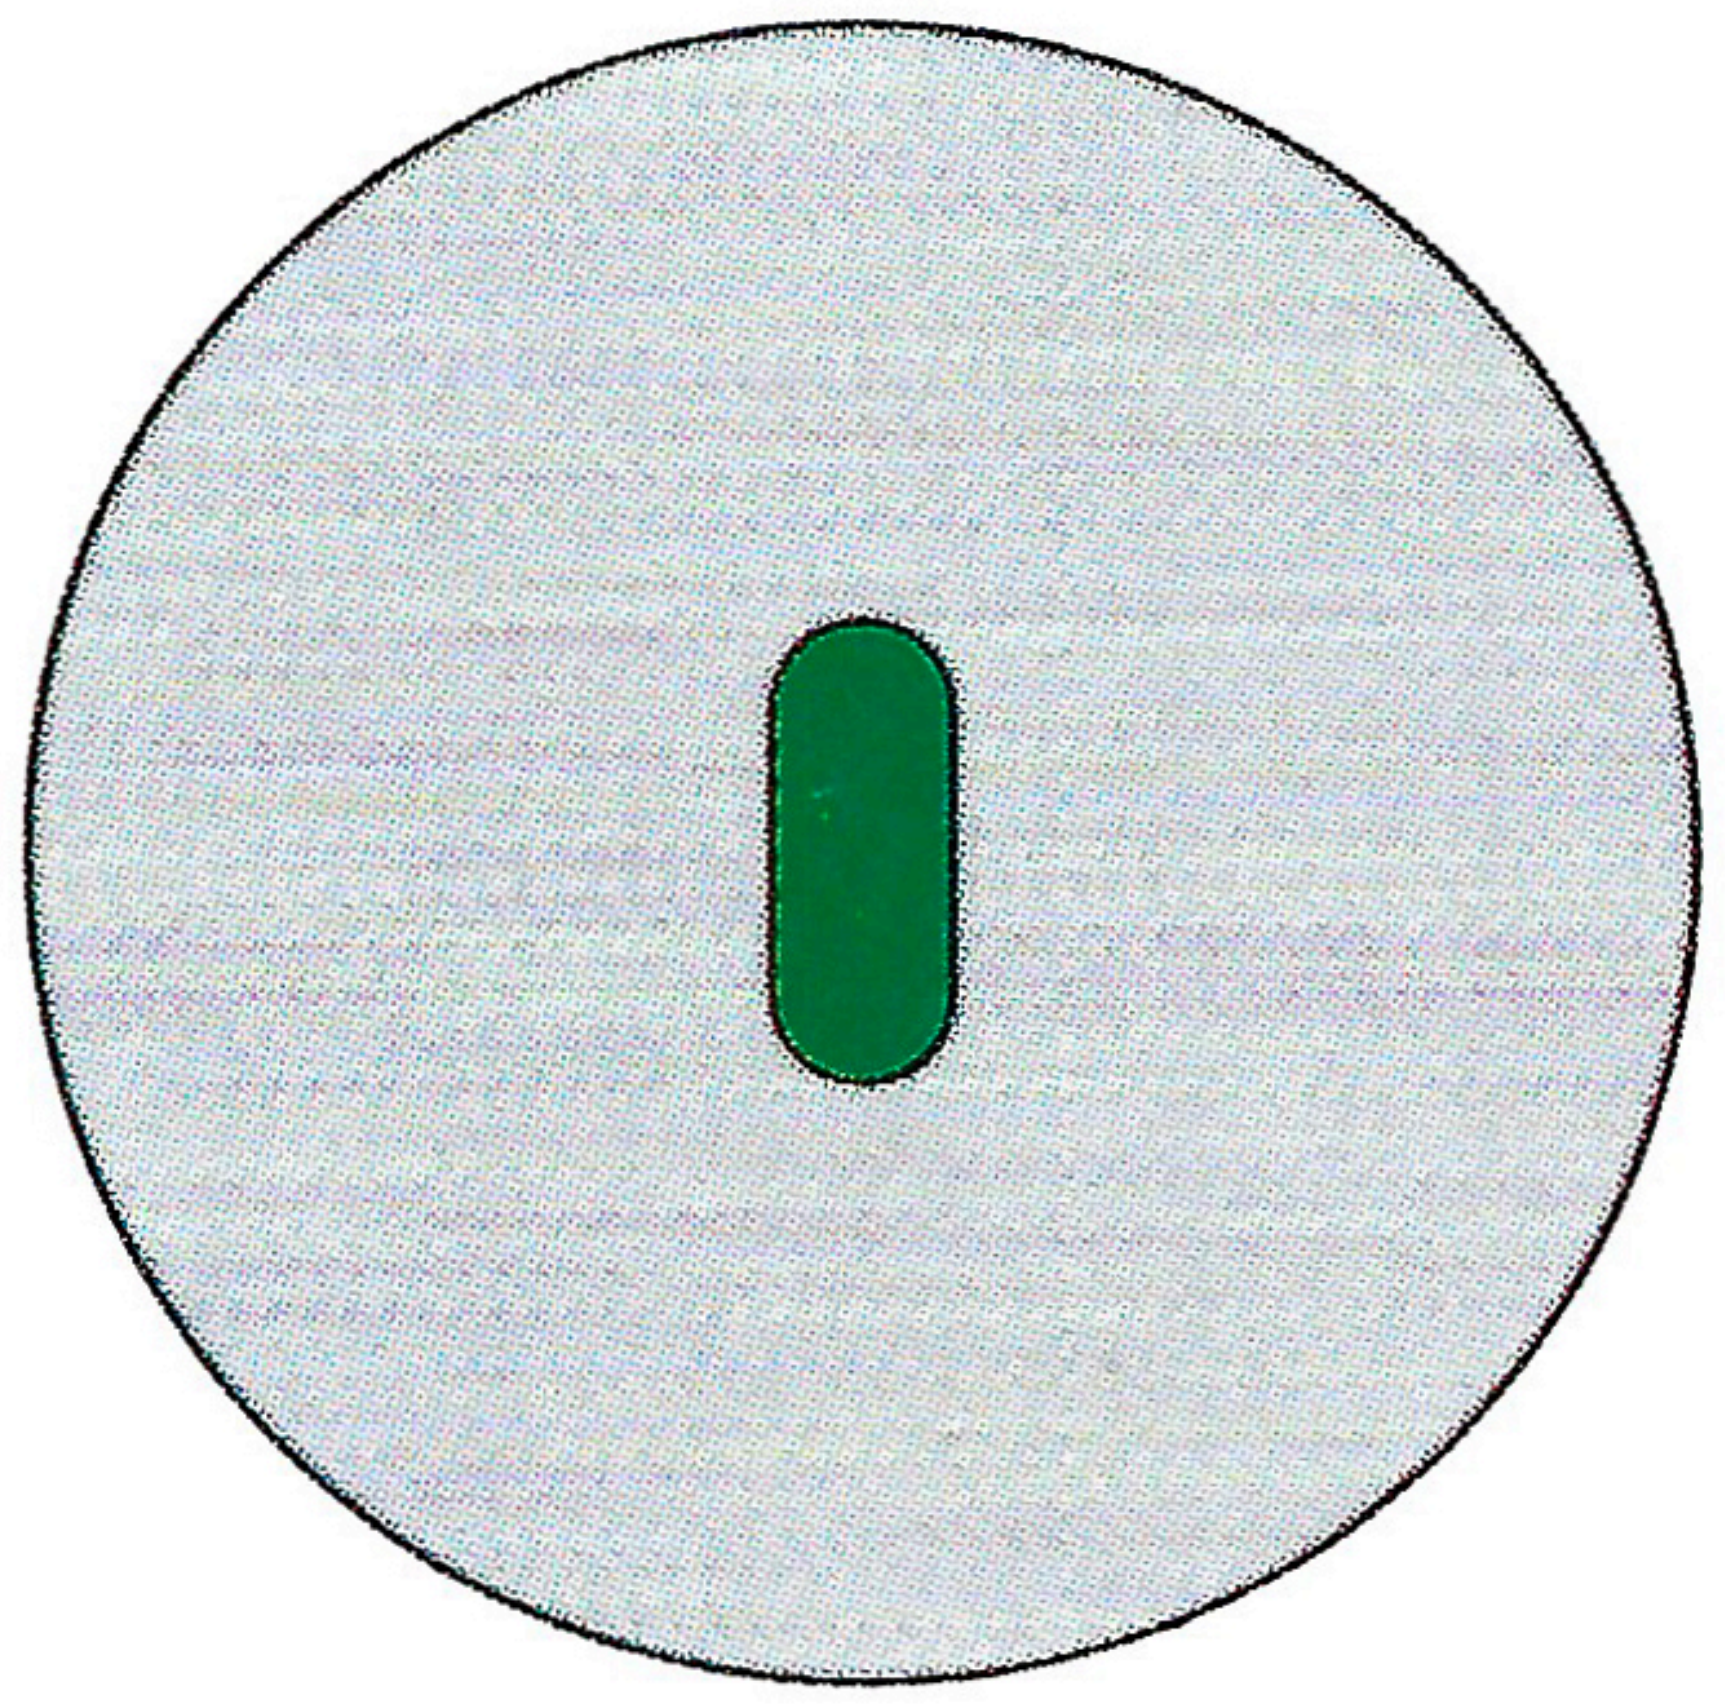

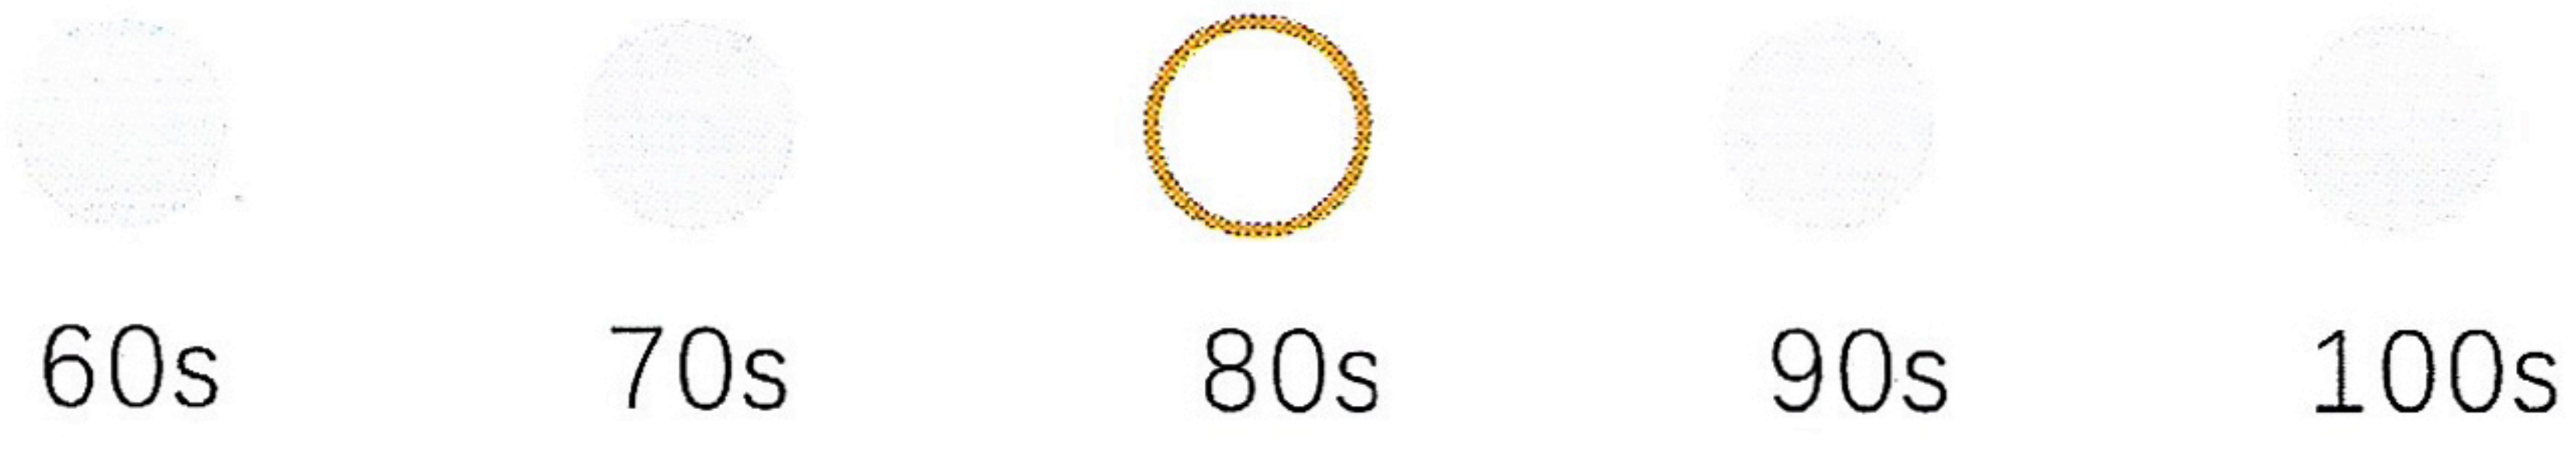

PRINTING SETTING

Use a sublimation printer to print your design on sublimation paper.

11 oz. mug

Temp. ▮ ● ● ○ ● ●

Time ▮ ● ● ○ ● ●

15 oz.mug

Temp. ▮ ● ● ○ ● ●

Time ▮ ● ● ○ ● ●

NOTE:

To continuously improve its products, US reserves the right to modify this information without prior notification.
For any questions during assembly, please watch the video in the product page for reference. Or contact our customer service with any questions, comments, or concerns.
Thank you for using US products in your home!